


Proportional 2-way flow control cartridge

- ◆ direct operated
- ◆ $Q_{max} = 2 \text{ l/min}$
- ◆ $Q_{Nmax} = 2 \text{ l/min}$
- ◆ $p_{max} = 350 \text{ bar}$

M18 x 1,5
 Wandfluh standard

DESCRIPTION


Direct operated, pressure compensated proportional flow control valve in screw-in cartridge construction for cavity according to Wandfluh standard. When the solenoid is deenergised, the control spool closes practically leakage-free. The change of the electric current is followed by a proportional volume flow change. From the input (1), the fluid flows over the control and throttling spool to the controlled output (2). For the control, Wandfluh proportional amplifiers are available (see register 1.13).

APPLICATION

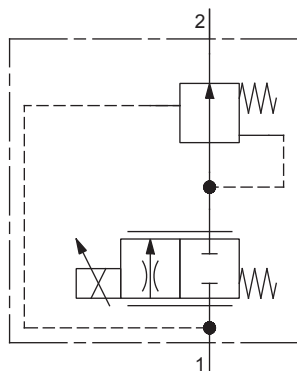
Proportional flow control valves are suitable for precise speed control, where the load current has to be maintained constant independent of the input and output pressure. The screw-in cartridge is perfectly suitable for installation in control blocks. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

SYMBOL

Simplified



Detailed


ACTUATION

Actuation	Proportional solenoid, wet pin push type, pressure tight
Execution	PI29V (Data sheet 1.1-90)
Connection	Connector socket EN 175301 – 803

TYPE CODE

Flow control valve			Q Z P PM18 -				#	
2-way								
Proportional								
Screw-in cartridge M18 x 1,5								
Nominal volume flow rate Q_N	2 l/min	<input type="text" value="2"/>						
Nominal voltage U_N	12 VDC	<input type="text" value="G12"/>						
	24 VDC	<input type="text" value="G24"/>						
Sealing material	NBR	<input type="text" value=""/>						
	FKM (Viton)	<input type="text" value="D1"/>						
Design index (subject to change)								

2.6-610

GENERAL SPECIFICATIONS

Designation	Proportional 2-way flow control valve
Construction	Direct operated
Mounting	Screw-in cartridge construction
Nominal size	M18 x 1,5 according to Wandfluh standard
Actuation	Proportional solenoid
Ambient temperature	-25...+70 °C
Weight	0,70 kg
MTTFd	150 years

HYDRAULIC SPECIFICATIONS

Working pressure	$p_{max} = 350 \text{ bar}$
Maximum volume flow	$Q_{max} = 2 \text{ l/min}$
Minimum volume flow	$Q_{min} = 0,02 \text{ l/min}$
Volume flow direction	1 → 2
Leakage oil	See characteristics
Nominal volume flow range	$Q_N = 2 \text{ l/min}$
Hysteresis	≤ 3 % at optimal dither signal
Repeatability	≤ 1 % at optimal dither signal
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 18 / 16 / 13
Filtration	Required filtration grade $\beta_{6...10} \geq 75$, see data sheet 1.0-50

SURFACE TREATMENT

- ◆ The cartridge body and the solenoid are zinc-nickel coated

INSTALLATION NOTES

Mounting type	Screw-in cartridge M18 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 40 \text{ Nm}$ Screw-in cartridge $M_D = 1,2 \text{ Nm}$ solenoid screws

ELECTRICAL SPECIFICATIONS

Protection class	IP65
Relative duty factor	100 % DF
Service life time	10 ⁷ (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24 VDC
Limiting current at 50 °C	$I_G = 1080 \text{ mA}$ (12 VDC) $I_G = 540 \text{ mA}$ (24 VDC)

Note! Other electrical specifications see data sheet 1.1-90



ACCESSORIES

Proportional amplifier	Register 1.13
Threaded body	Data sheet 2.9-205
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50

MANUAL OVERRIDE

HB4,5 as standard

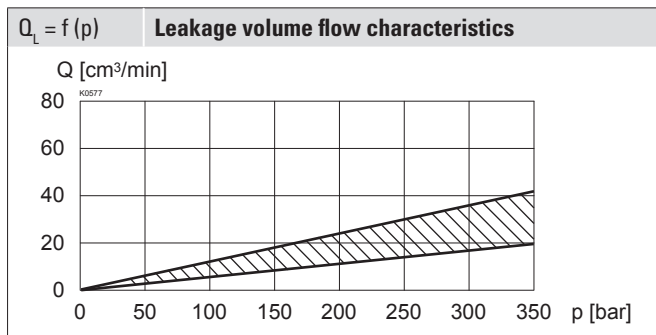
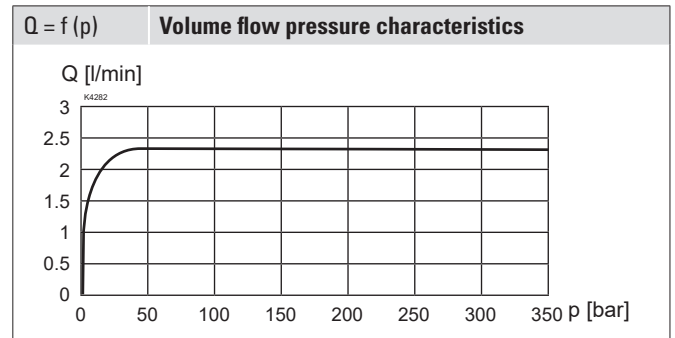
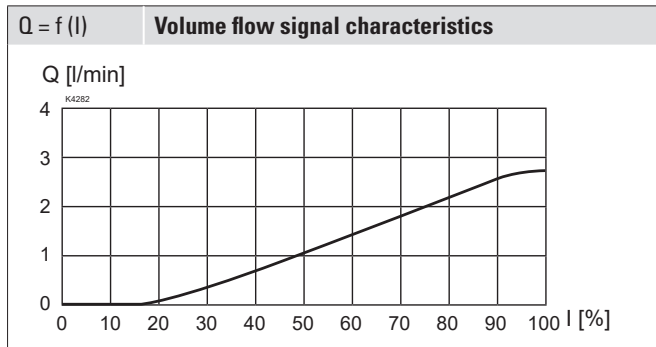
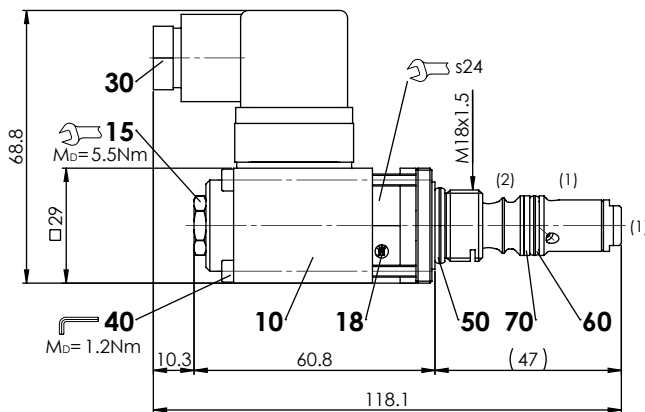
SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code


STANDARDS

Cartridge cavity	ISO 7789
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

PERFORMANCE SPECIFICATIONS

 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

DIMENSIONS

HYDRAULIC CONNECTION

Cavity drawing according to Wandfluh standard


Note!


For detailed cavity drawing and cavity tools see data sheet 2.13-1038

PARTS LIST

Position	Article	Description
10	256.2418	Proportional solenoid PI29V-G12
	256.2453	Proportional solenoid PI29V-G24
15	253.8000	Manual override HB4,5
18	160.2120	O-ring ID 12,42 x 1,78 (NBR)
30	219.2002	Electric plug B (black)
50	160.2156	O-ring ID 15,60 x 1,78 (NBR)
	160.6156	O-ring ID 15,60 x 1,78 (FKM)
60	160.2111	O-ring ID 11,11 x 1,78 (NBR)
	160.6111	O-ring ID 11,11 x 1,78 (FKM)
70	049.3156	Backup ring rd 12,1 x 15 x 1,4

Wandfluh AG Postfach CH-3714 Frutigen
 Tel. +41 33 672 72 72 Fax +41 33 672 72 12 sales@wandfluh.com