


Solenoid operated poppet valve cartridge

- ◆ solenoid operated
- ◆ pilot operated
- ◆ normally open and normally closed
- ◆ 2/2-way
- ◆ $Q_{max} = 300 \text{ l/min}$
- ◆ $p_{max} = 350 \text{ bar}$

M42 x 2
ISO 7789

DESCRIPTION


Pilot operated 2/2-way solenoid poppet valve in screw-in cartridge construction for cavity according to ISO 7789. The AB and CB execution is closed in the energised position, the BA and BC execution in the de-energised position. In this, the main spool closes practically leakage-free by means of the applied pressure.

APPLICATION


Wandfluh solenoid operated poppet valve cartridges are used where tight closing functions are essential like leakage-free load holding, clamping or gripping. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

SYMBOL


„Normally open“ AB




„Normally closed“ BA



„Normally closed“ BC



„Normally open“ CB


TYPE CODE

				S V S PM42 - <input type="text"/> - <input type="text"/> / <input type="text"/> <input type="text"/> - <input type="text"/> # <input type="text"/>	
Poppet valve					
Pilot operated					
Solenoid, Super					
Screw-in cartridge M42 x 2					
Designation of symbols acc. to table					
Nominal voltage U_N	12 VDC	<input type="text" value="G12"/>	115 VAC	<input type="text" value="R115"/>	
	24 VDC	<input type="text" value="G24"/>	230 VAC	<input type="text" value="R230"/>	
	without coil	<input type="text" value="X5"/>			
Slip-on coil	Metal housing, round	<input type="text" value="W"/>	(only G12 and G24)		
	Metal housing, square	<input type="text" value="M"/>			
Connection execution					
Connector socket EN 175301-803 / ISO 4400		<input type="text" value="D"/>			
Connector socket AMP Junior-Timer		<input type="text" value="J"/>			
Connector Deutsch DT04-2P		<input type="text" value="G"/>			
Sealing material	NBR	<input type="text"/>			
	FKM (Viton)	<input type="text" value="D1"/>			
Design index (subject to change)					

1.11-2091

GENERAL SPECIFICATIONS

Designation	2/2-way poppet valve
Construction	Pilot operated
Mounting	Screw-in cartridge construction
Nominal size	M42 x 2 according to ISO 7789
Actuation	Switching solenoid
Ambient temperature	-25...+70 °C
Weight	0,95 kg
MTTFd	150 years

HYDRAULIC SPECIFICATIONS

Working pressure	$p_{max} = 350$ bar
Opening pressure	2 bar 1 → 2 version AB / BA 2 bar 2 → 1 version AB / BA 1,5 bar 1 → 2 version BC / CB 1,5 bar 2 → 1 version BC / CB
Maximum volume flow	$Q_{max} = 300$ l/min, see characteristics
Leakage oil	Poppet type, max. 0,15 ml / min (approx. 3 drops / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50

ACTUATION

Actuation	Proportional solenoid, wet pin pull and push type, pressure tight.
Execution	W.E37 / 16 x 40 (Data sheet 1.1-169) M.E35 / 16 x 40 (Data sheet 1.1-171)
Connection	Connector socket EN 175301 – 803 Connector socket AMP Junior-Timer Connector Deutsch DT04 – 2P

ELECTRICAL SPECIFICATIONS

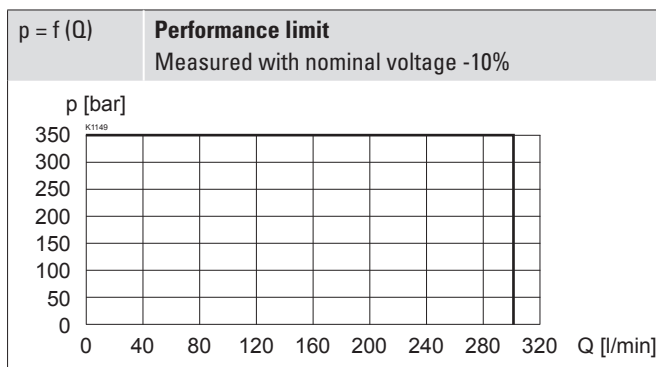
Protection class	Connection execution D: IP65 Connection execution J: IP66 Connection execution G: IP67 and IP69K
Relative duty factor	100 % DF, W.E37 only up to 50 °C
Switching frequency	5'000 / h
Service life time	10 ⁷ (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz, rectifier integrated in the connector socket

Note!


Other electrical specifications see data sheet 1.1-169 (slip-on coil W) and 1.1-171 (slip-on coil M)

PERFORMANCE SPECIFICATIONS

Oil viscosity $\nu = 30$ mm²/s

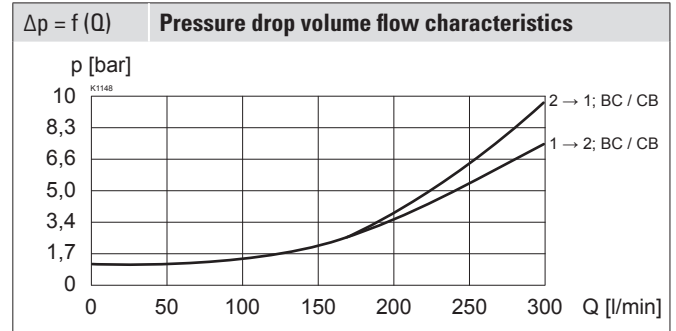
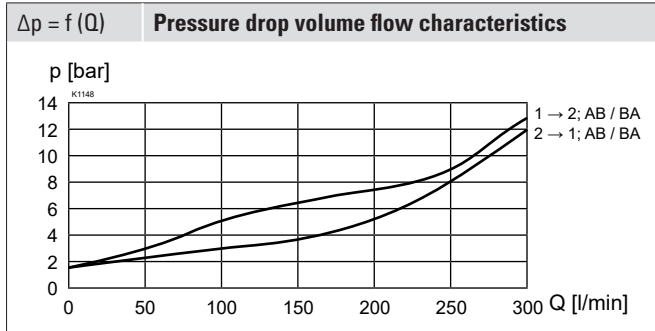

Switching times

Type	Flow direction	Energised	De-energised
SVSPM42	AB	1 → 2: approx. 200 ms 2 → 1: approx. 250 ms	approx. 35 ms
	BA	1 → 2: approx. 35 ms 2 → 1: approx. 35 ms	approx. 200 ms
CB	BC	2 → 1: approx. 35 ms	approx. 300 ms
	CB	2 → 1: approx. 300 ms	approx. 40 ms

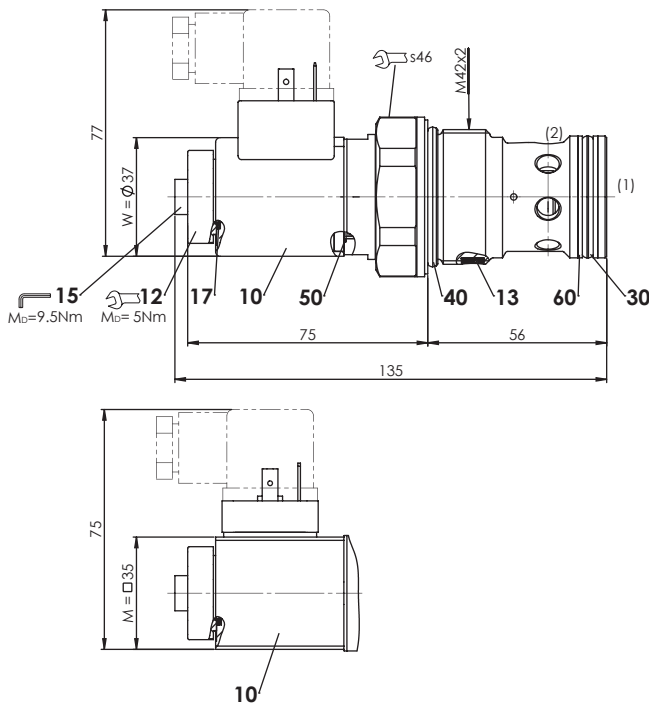
Note!


The switching times depend on the volume flow, pressure and viscosity. In case of very large volume flows, the switching time for closing can get considerably longer.


PERFORMANCE SPECIFICATIONS

 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$


Attention! Measured with cavity according to data sheet 2.13-1059 (annular groove)


DIMENSIONS

HYDRAULIC CONNECTION


Cavity drawing according to ISO 7789-42-01-0-07



Note! Detailed cavity drawing refer to data sheet 2.13-1050


HYDRAULIC CONNECTION

Cavity drawing according to ISO 7789-42-01-0-07 (with annular groove) recommended for minimum delta p values



Note! Detailed cavity drawing refer to data sheet 2.13-1059


PARTS LIST

Position	Article	Description
10	206.2...	W.E37 / 16 x 40
	260.4...	M.E35 / 16 x 40
12	154.2600	Knurled nut M16 x 1 x 9
13	212.0013	Plastic disc rd 7 x 1,5
15	239.2033	Screw plug HB0 (incl. seal)
17	160.2156	O-ring ID 15,60 x 1,78 (NBR)
30	160.2329	O-ring ID 32,99 x 2,62 (NBR)
	160.6325	O-ring ID 32,99 x 2,62 (FKM)
40	160.2377	O-ring ID 37,77 x 2,62 (NBR)
	160.6379	O-ring ID 37,77 x 2,62 (FKM)
50	160.1260	O-ring ID 26,00 x 1,00 (NBR)
60	049.8384	Backup ring PTSM rd 31 x 35,5 x 1,4

ACCESSORIES

Threaded body	Data sheet 2.9-2xx
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

STANDARDS

Cartridge cavity	ISO 7789
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

MANUAL OVERRIDE

Screw plug (HB0), no actuation possible.
Optionally HN (K) or HG (K) (pushing) resp. HZ (K) (pulling)
→ See data sheet 1.1-311

Attention! The manual override HZ (H91) cannot be retrofitted.



SURFACE TREATMENT

◆ The cartridge body, the slip-on coil and the armature tube are zinc-nickel coated

INSTALLATION NOTES

Mounting type	Screw-in cartridge M42 x 2
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 420 \text{ Nm}$ Screw-in cartridge $M_D = 5 \text{ Nm}$ knurled nut

Note!



Without varying pressure load in connection 2, a tightening torque reduced by 15% is sufficient