Threaded ports sandwich body
• p_{max} = 350 bar

NG6
ISO 4401-03



DESCRIPTION
Sandwich bodies NG6 according to ISO 4401-03 with ports G3/8" for external connection to A and B or P and T lines. Sandwich bodies with one external connection (A, B, P, T) will have the second port plugged with plug G3/8" (article 238.3402). The sandwich bodies are zinc coated and will be supplied inclusive 4 O-rings ID 9,25x1,78 (article no. 160.2093).

APPLICATION
Threaded ports sandwich bodies in stacking systems to connect gauges, sensors or control elements.

TYPE CODE

A SGK [ ] 6 # [ ]

- International standard interface ISO
- Sandwich threaded body
- Type list / Function

in A	A	in P	P
in B	B	in T	T
in A and B	AB	in P and T	PT

- Nominal size 6
- Design-Index (Subject to change)

TYPES

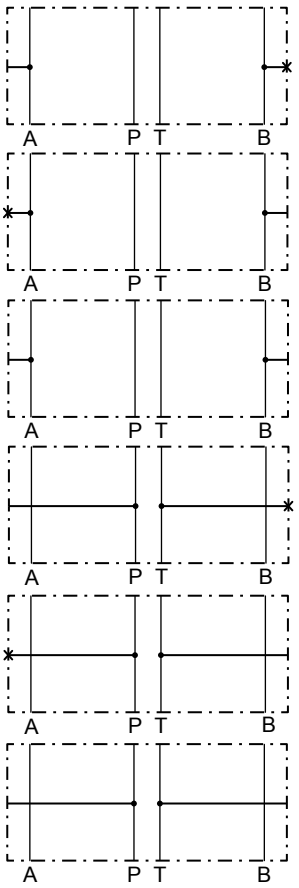

ASGKA6
(article 203.3501)

ASGKB6
(article 203.3502)

ASGKAB6
(article 203.3500)

ASGKP6
(article 203.3504)

ASGKT6
(article 203.3505)

ASGKPT6
(article 203.3503)

DIMENSIONS

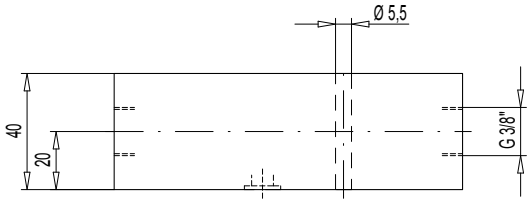

ASGKA, B, AB6

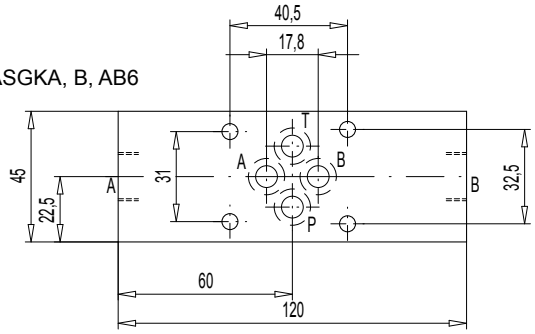
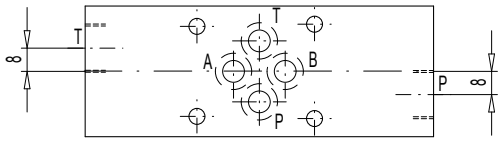
ASGKP, T, PT6