


Proportional pressure reducing cartridge inverse

- ◆ direct operated
- ◆ $Q_{\max} = 6 \text{ l/min}$
- ◆ $p_{\max} = 210 \text{ bar (350 bar)}$
- ◆ $p_{N \text{ red max}} = 40 \text{ bar}$

M16 x 1,5
Wandfluh standard




DESCRIPTION

Direct operated proportional pressure reducing valve with inverse function in screw-in cartridge construction for cavity according to Wandfluh standard. The proportional pressure reducing valve controls the pressure in port A (1). With the solenoid deenergised, maximum working pressure is present. If the solenoid current increases, the pressure in port A drops (1). The valve operates practically independently of the pressure in port P (2). Pressure increase in port A (1) to above the adjusted value, e.g. through an active consumer, is avoided by discharging excess oil to the tank (3). For the control, Wandfluh proportional amplifiers are available (see register 1.13).

APPLICATION

These valves are used in hydraulic systems where the pressure has to be changed frequently. The electrical remote control in conjunction with process controls allows economical solutions with repeatable processes. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

SYMBOL



ACTUATION

Actuation	Proportional solenoid, wet pin push type, pressure tight
Execution	W.S37 / 19 x 50 (Data sheet 1.1-173) M.S35 / 19 x 50 (Data sheet 1.1-174)
Connection	Connector socket EN 175301 – 803 Connector socket AMP Junior-Timer Connector Deutsch DT04 – 2P

STANDARDS

Cartridge cavity	Wandfluh standard
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

INSTALLATION NOTES

Mounting type	Screw-in cartridge type M16 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 30 \text{ Nm}$ Screw-in cartridge $M_D = 5 \text{ Nm}$ knurled nut

TYPE CODE

		M D I PM16 - <input type="text"/> - <input type="text"/> / <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> # <input type="text"/>	
Pressure reducing valve			
Direct operated			
Proportional, inverse			
Screw-in cartridge M16 x 1,5			
Nominal pressure range $p_{N\text{red}}$	25 bar <input type="text" value="25"/>		
	40 bar <input type="text" value="40"/>		
Nominal voltage U_N	12 VDC <input type="text" value="G12"/>		
	24 VDC <input type="text" value="G24"/>		
	without coil <input type="text" value="X5"/>		
Slip-on coil	Metal housing round <input type="text" value="W"/>		
	Metal housing square <input type="text" value="M"/>		
Connection execution	Connector socket EN 175301-803 / ISO 4400 <input type="text" value="D"/>		
	Connector socket AMP Junior - Timer <input type="text" value="J"/>		
	Connector Deutsch DT04 - 2P <input type="text" value="G"/>		
Sealing material	NBR <input type="text"/>		
	FKM (Viton) <input type="text" value="D1"/>		
	System pressure max. 210 bar <input type="text"/>		
	System pressure max. 350 bar <input type="text" value="Z406"/>		
Design index (subject to change)			

2.3-603

GENERAL SPECIFICATIONS

Designation	Proportional pressure reducing valve
Construction	Direct operated
Mounting	Screw-in cartridge construction
Nominal size	M16 x 1,5 according to Wandfluh standard
Actuation	Proportional solenoid
Ambient temperature	-25...+70 °C
Weight	0,45 kg
MTTFd	150 years

ELECTRICAL SPECIFICATIONS

Protection class	Connection execution D: IP65 Connection execution J: IP66 Connection execution G: IP67 and IP69K
Relative duty factor	100 % DF
Standard nominal voltage	12 VDC, 24 VDC
Limiting current at 50 °C	$I_G = 1360 \text{ mA } (U_N = 12\text{VDC})$ $I_G = 680 \text{ mA } (U_N = 24\text{VDC})$

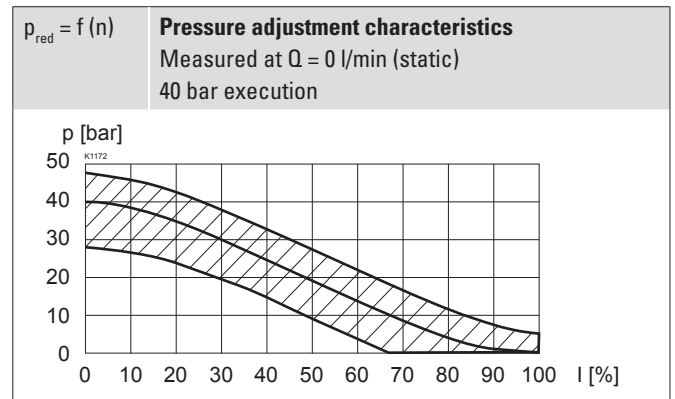
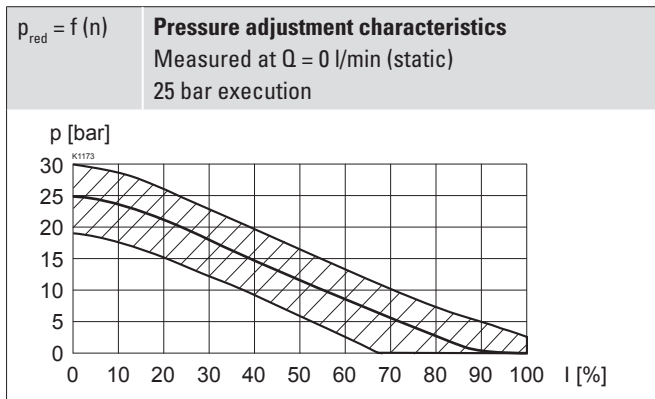
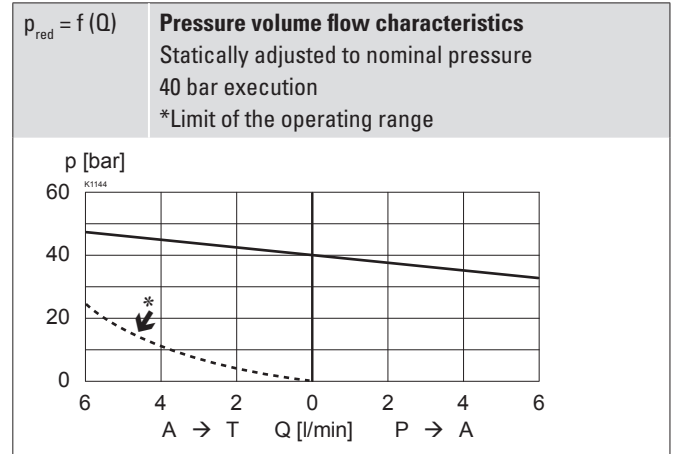
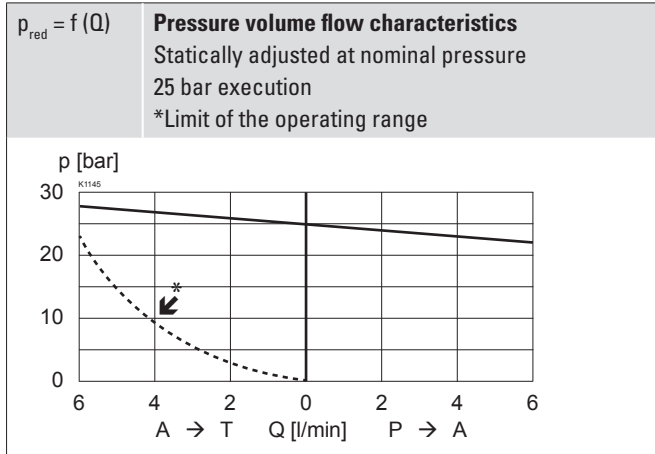
Note!


Other electrical specifications see data sheet 1.1-173 (slip-on coil W) and 1.1-174 (slip-on coil M)

HYDRAULIC SPECIFICATIONS

Working pressure	$p_{\text{max}} = 210 \text{ bar } (350 \text{ bar})$
Nominal pressure range	$P_{N\text{red}} = 25 \text{ bar}, 40 \text{ bar}$ Adjustable via adjustment screw (+20 % / -30 %)
Minimum adjustable pressure	< 0,5 bar
Volume flow range	$Q = 0 \dots 6 \text{ l/min}$
Leakage oil	25 bar execution at $p_{\text{sys}} = 210 \text{ bar}$ $p_{\text{red}} = 0 \text{ bar}: < 10 \text{ ml/min}$ $p_{\text{red}} = 25 \text{ bar}: < 50 \text{ ml/min}$ 40 bar execution at $p_{\text{sys}} = 210 \text{ bar}$ $p_{\text{red}} = 0 \text{ bar}: < 10 \text{ ml/min}$ $p_{\text{red}} = 45 \text{ bar}: < 40 \text{ ml/min}$
Hysteresis	$\leq 4 \%$ at optimal dither signal
Repeatability	$\leq 1 \%$ at optimal dither signal
Fluid	Mineral oil, other fluid on request
Viscosity range	$12 \text{ mm}^2/\text{s} \dots 320 \text{ mm}^2/\text{s}$
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 18 / 16 / 13
Filtration	Required filtration grade $\beta_{6 \dots 10} \geq 75$, see data sheet 1.0-50

PERFORMANCE SPECIFICATIONS

 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

ACCESSORIES

Proportional amplifier	Register 1.13
Electric plug B (black)	Article no. 219.2002
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50

SURFACE TREATMENT

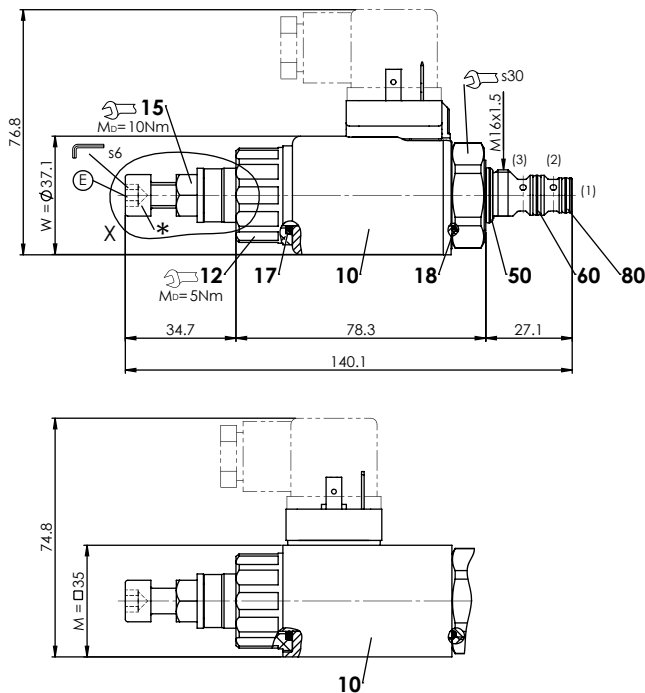
- ◆ The cartridge body is gas-nitro carburised
- ◆ The slip-on coil and the armature tube are zinc nickel coated

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

MANUAL OVERRIDE

None


DIMENSIONS


E = Air bleed screw


*Adjustment screw for adjusting the nominal pressure

PARTS LIST

Position	Article	Description
10	206.2...	W.S37 / 19 x 50
	260.5...	M.S35 / 19 x 50
12	154.2700	Knurled nut
15	153.2401	Dichtmutter Norm „Seal-Lock“ 8 Zi - Ni M8
17	160.2187	O-ring ID 18,72 x 2,62 (NBR)
18	160.2170	O-ring ID 17,17 x 1,78 (NBR)
50	160.2140	O-ring ID 14,00 x 1,78 (NBR)
	160.8140	O-ring ID 14,00 x 1,78 (FKM)
60	160.2093	O-ring ID 9,25 x 1,78 (NBR)
	160.8092	O-ring ID 9,25 x 1,78 (FKM)
80	160.2076	O-ring ID 7,65 x 1,78 (NBR)
	160.8076	O-ring ID 7,65 x 1,78 (FKM)


HYDRAULIC CONNECTION

Cavity drawing according to Wandfluh standard


Attention! For detailed cavity drawing and cavity tools see data sheet 2.13-1051

COMMISSIONING

When commissioning, the valve must be vented under pressure as follows (see detail X in Dimensions):

- ◆ Loosen lock nut
- ◆ Remove screw (E)
- ◆ Push the non-return valve (with pin or hex key < 1,3 mm)
- ◆ Screw-in the screw (E)
- ◆ Adjust the required pressure and tighten the lock nut

Attention! Therewith oil flows out with the corresponding pressure! Cover with a cloth.
