


Proportional pressure reducing cartridge

- ◆ direct operated by means of pilot spool
- ◆ $Q_{\max} = 20 \text{ l/min}$
- ◆ $p_{\max} = 350 \text{ bar}$
- ◆ $p_{N \text{ red max}} = 200 \text{ bar}$

DESCRIPTION

Direct operated proportional pressure reducing valve with pilot spool actuation in screw-in cartridge construction for cavity according Wandfluh standard. The proportional pressure reducing valve controls the pressure in port A (1). Proportionally to the solenoid current, the solenoid force and the pressure in port A (1) rise. The valve functions practically independently of the pressure in port P (2). Pressure increase in the consumer port A (1) to above the adjusted value, e.g. through an active consumer, is avoided by discharging excess oil to the tank T (3). With the solenoid deenergised, the oil flows freely from consumer port A (1) to port T (3). For the control, Wandfluh proportional amplifiers are available (see register 1.13).

SYMBOL

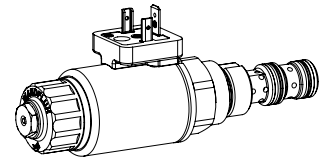


STANDARDS

Cartridge cavity	Wandfluh standard
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

7/8"-14 UNF

Wandfluh standard



APPLICATION

These valves are used in hydraulic systems where the pressure has to be changed frequently. The electrical remote control in conjunction with process controls allows economical solutions with repeatable processes. Direct operated pressure reducing valves are used where a low minimal adjustable pressure is required. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

ACTUATION

Actuation	Proportional solenoid, wet pin push type, pressure tight
Execution	W.S37 / 19 x 50 (Data sheet 1.1-173) M.S35 / 19 x 50 (Data sheet 1.1-174)
Connection	Connector socket EN 175301 – 803 Connector socket AMP Junior-Timer Connector Deutsch DT04 – 2P

INSTALLATION NOTES

Mounting type	Screw-in cartridge 7/8"-14 UNF
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 60 \text{ Nm}$ Screw-in cartridge $M_D = 5 \text{ Nm}$ knurled nut $M_D = 9,5 \text{ Nm}$ HB0 $M_D = 5,5 \text{ Nm}$ HB4,5

TYPE CODE

		M P P PU10 - <input type="text"/> - <input type="text"/> / <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> # <input type="text"/>			
Pressure reducing valve					
Direct operated by means of pilot spool					
Proportional					
Screw-in cartridge 7/8" - 14 UNF					
Nominal pressure range $p_{N\text{red}}$	20 bar	<input type="text" value="20"/>	115 bar	<input type="text" value="115"/>	
	80 bar	<input type="text" value="80"/>	200 bar	<input type="text" value="200"/>	
Nominal voltage U_N	12 VDC	<input type="text" value="G12"/>			
	24 VDC	<input type="text" value="G24"/>			
	without coil	<input type="text" value="X5"/>			
Slip-on coil	Metal housing round		<input type="text" value="W"/>		
	Metal housing square		<input type="text" value="M"/>		
Connection execution	Connector socket EN 175301 - 803 / ISO 4400		<input type="text" value="D"/>		
	Connector socket AMP Junior - Timer		<input type="text" value="J"/>		
	Connector Deutsch DT04 - 2P		<input type="text" value="G"/>		
Sealing material	NBR	<input type="text"/>			
	FKM (Viton)	<input type="text" value="D1"/>			
Manual override	Manual override		<input type="text" value="HB4,5"/>		
	Screw plug		<input type="text" value="HB0"/>		
Design index (subject to change)					

2.3-673

GENERAL SPECIFICATIONS

Designation	Proportional pressure reducing valve
Construction	Direct operated by means of pilot spool
Mounting	Screw-in cartridge construction
Nominal size	7/8"-14 UNF according to Wandfluh standard
Actuation	Proportional solenoid
Ambient temperature	-25...+70 °C
Weight	0,55 kg
MTTFd	150 years

ELECTRICAL SPECIFICATIONS

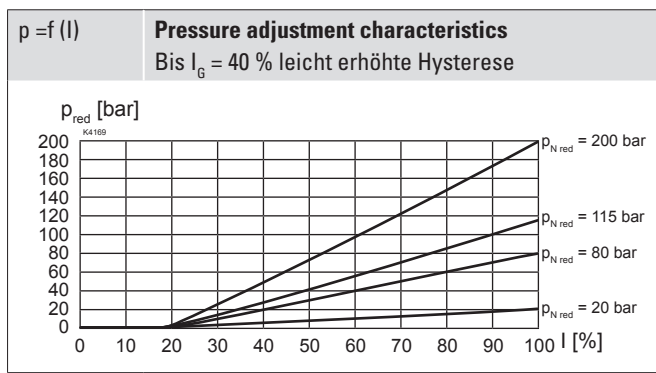
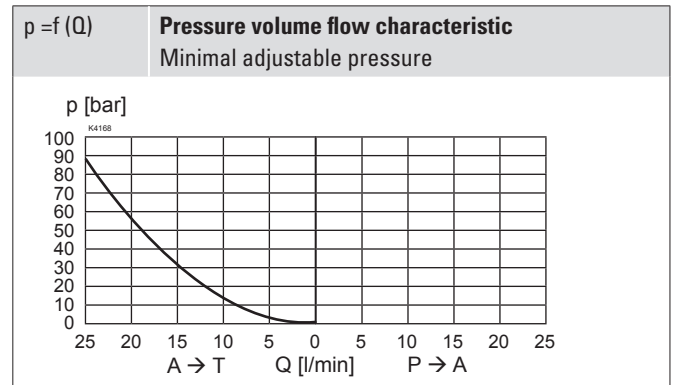
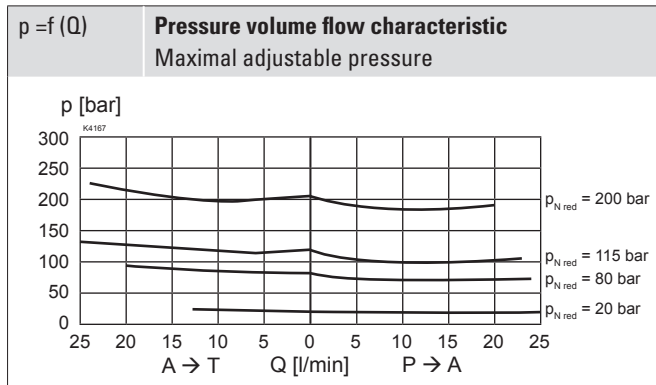
Protection class	Connection execution D: IP65 Connection execution J: IP66 Connection execution G: IP67 and IP69K
Relative duty factor	100 % DF
Standard nominal voltage	12 VDC, 24 VDC
Limiting current at 50 °C	$I_G = 1360 \text{ mA } (U_N = 12\text{VDC})$ $I_G = 680 \text{ mA } (U_N = 24\text{VDC})$

Note! Other electrical specifications see data sheet 1.1-173 (slip-on coil W) and 1.1-174 (slip-on coil M)


HYDRAULIC SPECIFICATIONS

Working pressure	$p_{\text{max}} = 350 \text{ bar}$
Nominal pressure range	$P_{N\text{red}} = 20, 80, 115, 200 \text{ bar}$
Minimum adjustable pressure	< 1 bar
Volume flow range	See characteristic
Leakage oil	at $p_{\text{sys}} = 350 \text{ bar}$ < 30 ml/min for $p_{N\text{red}} = 20, 80, 115 \text{ bar}$ < 50 ml/min for $p_{N\text{red}} = 200 \text{ bar}$
Hysteresis	≤ 4 % at optimal dither signal
Repeatability	≤ 1 % at optimal dither signal
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 18 / 16 / 13
Filtration	Required filtration grade $\beta_{6...10} \geq 75$, see data sheet 1.0-50

PERFORMANCE SPECIFICATIONS

 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

ACCESSORIES

Proportional amplifier	Register 1.13
Electric plug B (black)	Article no. 219.2002
Technical explanations	Data sheet 1.0-100
Hydraulic fluids	Data sheet 1.0-50
Filtration	Data sheet 1.0-50

SURFACE TREATMENT

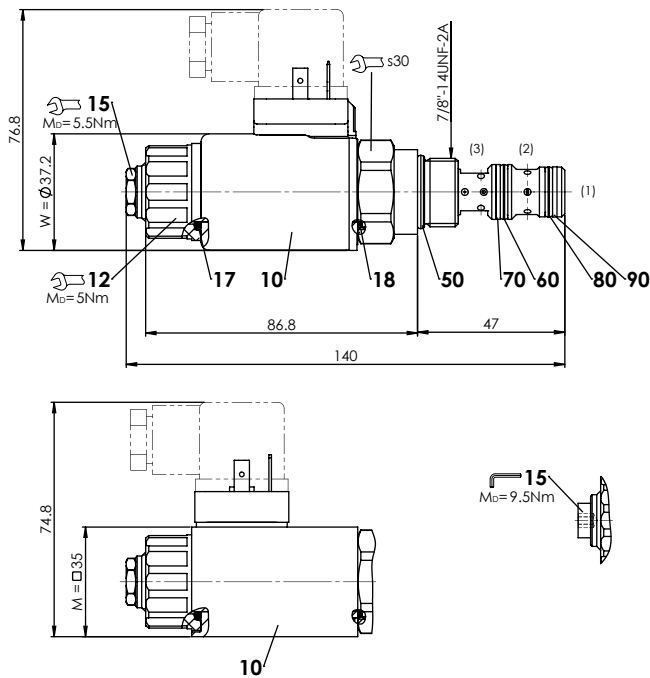
- ◆ The cartridge body, the slip-on coil and the armature tube are zinc-nickel coated

MANUAL OVERRIDE

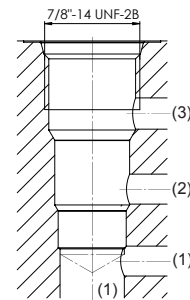
HB4,5
 Optionally: Screw plug (HB0), no actuation possible

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

DIMENSIONS

HYDRAULIC CONNECTION

Cavity drawing according to Wandfluh standard


Attention! For detailed cavity drawing and cavity tools see data sheet 2.13-1045

PARTS LIST

Position	Article	Description
10	206.2...	W.S37 / 19 x 50
	260.5...	M.S35 / 19 x 50
12	154.2700	Knurled nut
15	253.8000	HB4,5 manual override
	239.2033	HB0 Screw plug
17	160.2187	O-ring ID 18,72 x 2,62 (NBR)
	160.6187	O-ring ID 18,72 x 2,62 (FKM)
18	160.2170	O-ring ID 17,17 x 1,78 (NBR)
	160.6172	O-ring ID 17,17 x 1,78 (FKM)
50	160.2188	O-ring ID 18,77 x 1,78 (NBR)
	160.6188	O-ring ID 18,77 x 1,78 (FKM)
60	160.2140	O-ring ID 14,00 x 1,78 (NBR)
	160.6141	O-ring ID 14,00 x 1,78 (FKM)
70	049.8177	Back-up ring PTSM rd 12,4 x 15,3 x 1,4
80	160.2120	O-ring ID 12,42 x 1,78 (NBR)
	160.6124	O-ring ID 12,42 x 1,78 (FKM)
90	049.8166	Backup ring PTSM rd 10,8 x 13,7 x 1,4