


### Solenoid operated poppet valve cartridge

- ◆ solenoid operated
- ◆ pilot operated
- ◆ normally open and normally closed
- ◆ 2/2-way
- ◆  $Q_{max} = 80 \text{ l/min}$
- ◆  $p_{max} = 350 \text{ bar}$

**M22 x 1,5**  
**ISO 7789**



### DESCRIPTION


Pilot operated 2/2-way solenoid poppet valve in screw-in cartridge construction for cavity according to ISO 7789. The CB execution is closed in the energised position, the BC execution in the de-energised position. In this, the main spool closes practically leakage-free by means of the applied pressure. In the opposite flow direction, the valve opens after reaching the opening pressure.

### APPLICATION


Wandfluh solenoid operated poppet valve cartridges are used where tight closing functions are essential like leakage-free load holding, clamping or gripping. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

### SYMBOL

„Normally closed“ BC



„Normally open“ CB



### TYPE CODE

	S V S PM22 - <input type="text"/> - <input type="text"/> / <input type="text"/> - <input type="text"/> # <input type="text"/>
Poppet valve	
Pilot operated	
Solenoid, Super	
Screw-in cartridge M22 x 1,5	
2/2 way, «normally closed»	<input type="text" value="BC"/>
2/2 way, «normally open»	<input type="text" value="CB"/>
Nominal voltage $U_N$	12 VDC <input type="text" value="G12"/> 115 VAC <input type="text" value="R115"/> 24 VDC <input type="text" value="G24"/> 230 VAC <input type="text" value="R230"/> without coil <input type="text" value="X5"/>
Slip-on coil	Metal housing, round <input type="text" value="W"/> (only G12 and G24) Metal housing, square <input type="text" value="M"/>
Connection execution	
Connector socket EN 175301-803 / ISO 4400	<input type="text" value="D"/>
Connector socket AMP Junior-Timer	<input type="text" value="J"/>
Connector Deutsch DT04-2P	<input type="text" value="G"/>
Sealing material	NBR <input type="text"/> FKM (Viton) <input type="text" value="D1"/>
Design index (subject to change)	

1.11-2082

**GENERAL SPECIFICATIONS**

Designation	2/2-way poppet valve
Construction	Pilot operated
Mounting	Screw-in cartridge construction
Nominal size	M22 x 1,5 according to ISO 7789
Actuation	Switching solenoid
Ambient temperature	-25...+70 °C
Weight	0,45 kg
MTTFd	150 years

**HYDRAULIC SPECIFICATIONS**

Working pressure	$p_{max} = 350 \text{ bar}$
Maximum volume flow	$Q_{max} = 80 \text{ l/min}$ , see characteristics
Leakage oil	Poppet type, max. 0,15 ml / min (approx. 3 drops / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm <sup>2</sup> /s...320 mm <sup>2</sup> /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$ , see data sheet 1.0-50

**ACTUATION**

Actuation	Switching solenoid, wet pin push + pull type, pressure tight
Execution	W.E37 / 16 x 40 (Data sheet 1.1-169) M.E35 / 16 x 40 (Data sheet 1.1-171)
Connection	Connector socket EN 175301 – 803 Connector socket AMP Junior-Timer Connector Deutsch DT04 – 2P



**ELECTRICAL SPECIFICATIONS**

Protection class	Connection execution D: IP65 Connection execution J: IP66 Connection execution G: IP67 and IP69K
Relative duty factor	100 % DF, W.E37 only up to 50 °C
Switching frequency	5'000 / h
Service life time	10 <sup>7</sup> (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz, rectifier integrated in the connector socket

**Note!** Other electrical specifications see data sheet 1.1-169 (slip-on coil W) and 1.1-171 (slip-on coil M)


**PERFORMANCE SPECIFICATIONS**

Oil viscosity  $\nu = 30 \text{ mm}^2/\text{s}$

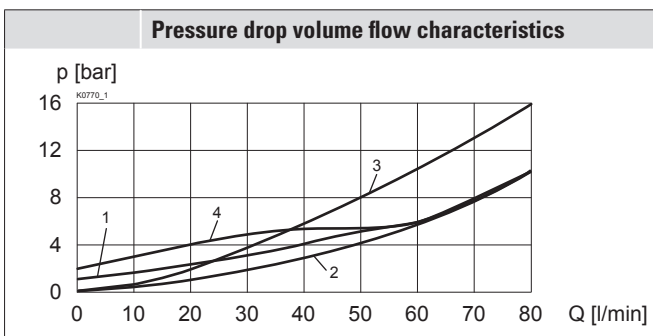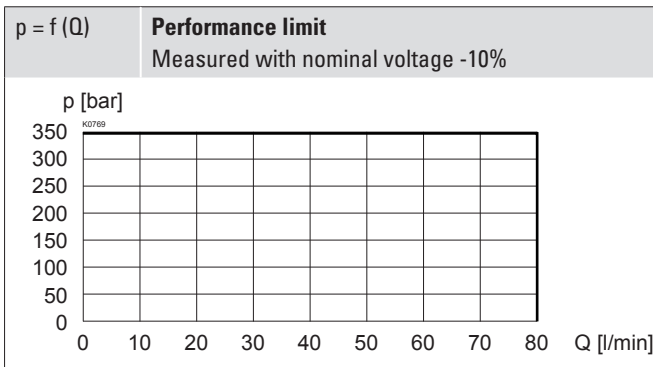

**Switching times**

Type	Flow direction	Switch on	Switch off	
SVSPM22	BC	2 → 1	approx. 30 ms	approx. 150 ms
	CB	2 → 1	approx. 45 ms	approx. 85 ms

**Note!** The switching times depend on the volume flow, pressure and viscosity. In case of very large volume flows, the switching time for closing can get considerably longer.


	BC	CB
de-energised 1 → 2	1	2
de-energised 2 → 1	-	3
energised 1 → 2	2	4
energised 2 → 1	3	-

## DIMENSIONS

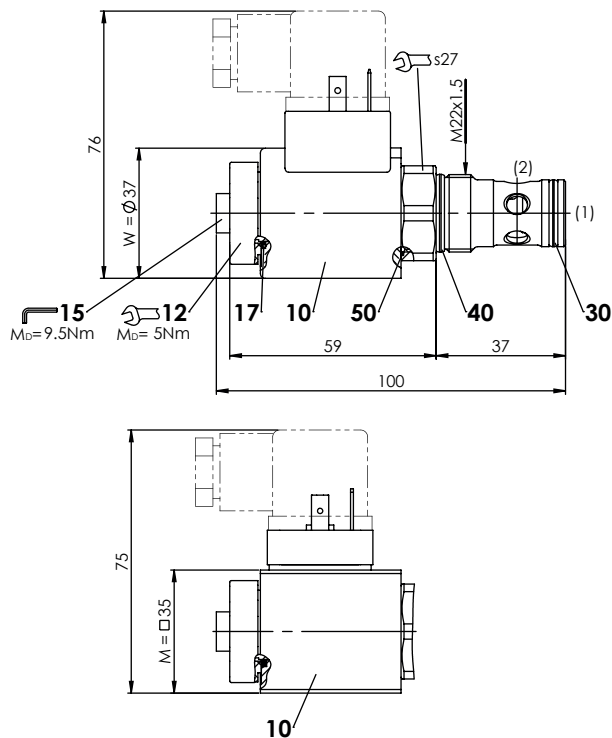

## HYDRAULIC CONNECTION

Cavity drawing according to ISO 7789-22-01-0-98



### Note!



For detailed cavity drawing and cavity tools see data sheet 2.13-1008

## MANUAL OVERRIDE

Optionally HN (K) or HG (K) (pushing) resp. HZ (K) (pulling)  
 → See data sheet 1.1-311

## SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

## PARTS LIST

Position	Article	Description
10	206.2...	W.E37 / 16 x 40
	260.4...	M.E35 / 16 x 40
12	154.2600	Knurled nut M16 x 1 x 9
15	239.2033	Screw plug HB0 (incl. seal)
...		Seal kit SVSPM22 BC/CB
<b>Seal kit consisting of:</b>		
17	O-ring	ID 15,60 x 1,78
30	O-ring	ID 15,60 x 1,78 (polyurethan)
40	O-ring	ID 18,77 x 1,78
50	O-ring	ID 22,00 x 1,00

## SURFACE TREATMENT

- ◆ The cartridge body, the slip-on coil and the armature tube are zinc-nickel coated

## ACCESSORIES

Threaded body	Data sheet 2.9-2xx
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

## INSTALLATION NOTES

Mounting type	Screw-in cartridge M22 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 60 \text{ Nm}$ Screw-in cartridge $M_D = 5 \text{ Nm}$ knurled nut

## STANDARDS

Cartridge cavity	ISO 7789
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406